

180W

□104×104mm



电机技术参数 Motor Technical Parameters

电机型号 Motor Model	功率 Power	电压 Voltage	频率 Frequency	电流 Current	启动转矩 Starting Torque	额定转矩 Rated Torque	额定转速 Rated Speed	额定时间 Rated Time	电容 Capacitor
61K180/200A-A	180/200	1PH110	50	4.914	1.839	1.115	1350	连续	30/250
61K180/200A-C	180/200	1PH220	50	2.457	1.839	1.115	1350	连续	10/450
61K180/200A-S	180/200	3PH220	50	3.088	2.405	1.115	1350	连续	
61K180/200A-U	180/200	(三相)	60	1.788	2.405	1.137	1680	连续	
61K180/200A-A	180/200	1PH110	50	4.914	1.839	1.115	1350	30	30/250
61K180/200A-C	180/200	1PH220	50	2.457	1.839	1.115	1350	30	10/450
61K180/200A-AU	180/200	1PH110	50	4.914	1.839	1.115	1350	30	30/250
61K180/200A-CU	180/200	1PH220	50	2.457	1.839	1.115	1350	30	10/450
61K180/200A-SU	180/200	3PH220	50	3.088	2.405	1.115	1350	连续	
61K180/200A-UU	180/200	(三相)	60	1.788	2.405	1.137	1680	连续	

电机型号 Motor Model	功率 Power	电压 Voltage	频率 Frequency	调速范围 Speed Control Range	启动转矩 Starting Torque	额定转矩 Rated Torque	额定时间 Rated Time	电容 Capacitor
61K180/200A-A	180/200	1PH110	50	90-1400	27.59	21.23	1.41	30/250
61K180/200A-C	180/200	1PH220	50	90-1400	27.59	21.23	1.41	10/450

减速电机容许转矩 (额定转矩) Reduction Motor Max Allowable Torque (the Rated Torque)

减速比 Reduction Ratio	功率 Power	2	2.5	3	3.6	4	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	250	300
50%	转速 r/min	675	540	450	375	337	270	225	180	150	135	108	90	75	68	54	45	38	34	27	23	18	15	14	12	9	7.5	6.8	5.4	4.5
	转矩 N.m	2.5	3.2	3.8	4.6	5.1	6.4	7.6	9.6	11.5	12.7	15.9	19.1	22.9	25.3	31.8	38.2	45.2	50.6	63.7	74.7	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
60%	转速 r/min	840	672	550	458	413	330	275	220	183	165	132	110	92	83	66	55	45	42	33	28	22	18	16	14	11	9	8	6.5	5.5
	转矩 N.m	2.0	2.6	3.1	3.8	4.2	5.2	6.3	7.8	9.4	10.4	13.0	15.6	18.7	20.7	26.0	31.3	38.2	40.9	52.1	61.4	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1


注意: 使用电压和机型号不同, 电容容量不一样, 订货时请务必指明机型的型号。

色与马达成反方向, 其余则与马达同一方向回转。

转速是以电动机的异步转速(50Hz:1350r/min, 60Hz:1680r/min)为基准除以减速比而算出来的数值。实际转速将随负载大小变化而有所变化。希望以大于上表的减速比进行进一步减速时, 可在电动机与减速器之间安装减速比为1:10的中间减速器。


光轴型(圆轴、扁轴、键槽)

Round shaft type(round, milling, keyway)

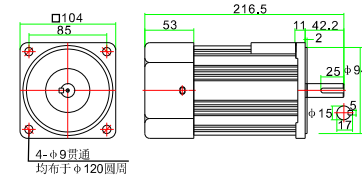


4-φ9贯通  
均布于φ120圆周

φ15GK定/调速型  
GK constant speed/speed regulation type

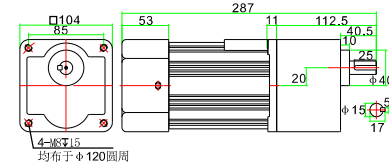


4-φ15贯通  
均布于φ120圆周

φ18GK定/调速型  
φ18GK constant speed/speed regulation type

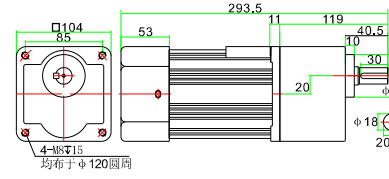

4-φ18贯通  
均布于φ120圆周


GS定/调速型  
GS Constant speed/Speed regulation type

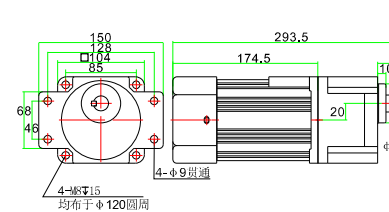

4-φ15贯通  
均布于φ120圆周


GK定/调速型带端子箱

GK Constant speed type with terminal box

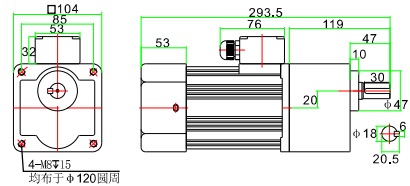


4-φ15贯通  
均布于φ120圆周

φ15GK刹车定/调速型  
GK brake constant speed/speed regulation type

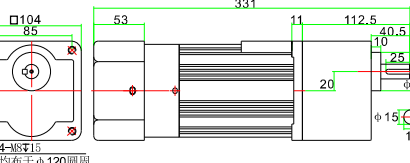


4-φ15贯通  
均布于φ120圆周

φ18GK刹车定/调速型  
φ18GK brake constant speed/speed regulation type

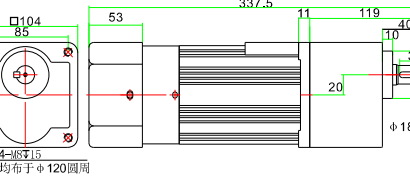

4-φ18贯通  
均布于φ120圆周

GS刹车定/调速型  
GS Brake constant speed/speed regulation type

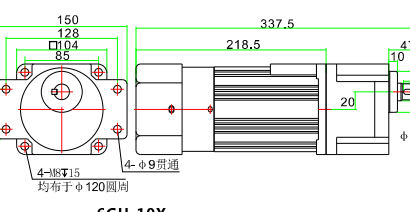

4-φ15贯通  
均布于φ120圆周

